



03 Peripheral Sender Box Structure-SS6

SS6 Introduction

SS6 video distribution structure, built-in DVI distributor with 3 DVI distribution, each input can be assigned to 2 output. SS8 is well-designed with a card push-pull structure which supports 6 sender card slots(2 Nova MSD600) makes installation easier.

SS6 is compatible with all manufacturers' sender cards, including Linsn 801/802, Nova MSD300, MSD600, Mooncell, Colorlight and DBSTAR.

SS6 signal adaptive matching design solves the problem of high-resolution signals interference and non-synchronization during distribution. The distribution system solves the problems of cascade, signal backup and also protects the interface of the sending card. The SS6 has high speed fan to solve the heat dissipation.

SS6 Features

- 1 Built-in Fan
- 2 Compatible with all manufacturers' send cards,support 6 small cards or 2 large cards
- 3 Unified installation management to reduce purchase costs
- 4 Drawer design, no need to disassemble the device
- 5 DVI signal distribution, each DVI input is assigned to 2 DVI outputs



SS6 Parameters

| | |
|---------------|--|
| Input | 3 × DVI |
| Output | 6 × DVI |
| Input RES | 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152 |
| Output RES | 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152 |
| Input Voltage | AC 100~264V (Typical 110/220) |
| Max Power | 40W |
| TEMP | -25°C~55°C (Typical 25°C) |
| Humidity | 20%~90% |
| Weight | 3.5kg (Net Weight) 6.7 kg (Packaged) |
| Dimensions | 480mm x 282mm x 70mm (Device) 540mm x 380mm x 140mm (Packaged) |

SS6 Overview



SS6 Dimension

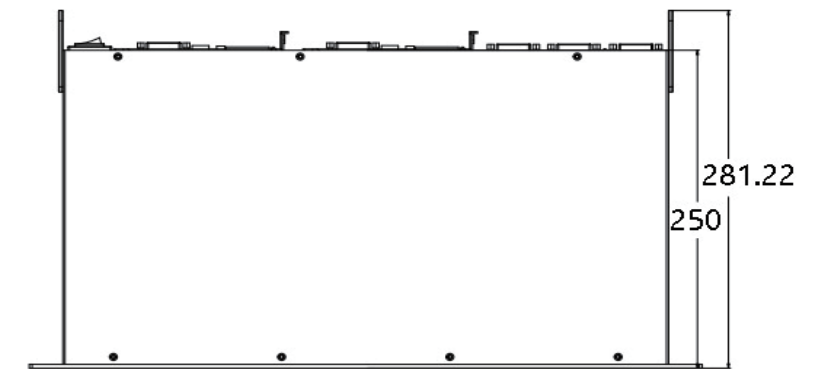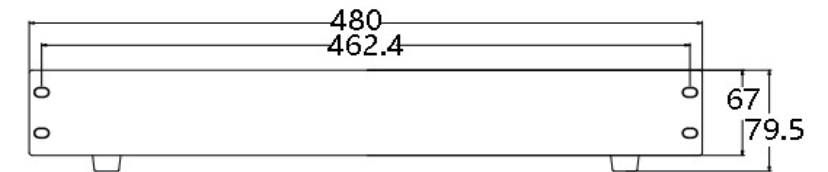

SS6 Solution

